Scilab Manual for Digital Control System by Prof Deepti Khimani Instrumentation Engineering VESIT[1]

Solutions provided by
Prof Deepti Khimani
Instrumentation Engineering
Mumbai/ V.E.S. Institute of Technology

February 12, 2026

[1]Funded by a grant from the National Mission on Education through ICT, http://spoken-tutorial.org/NMEICT-Intro. This Scilab Manual and Scilab codes written in it can be downloaded from the "Migrated Labs" section at the website http://scilab.in

Contents

List of Experiments

List of Figures

Experiment: 1

Represent the given discrete-time (sampled data) sytem using pulse transfer function and state space forms.

Scilab code Solution 1.01 Lab01

```
1 // Lab01: (A) Represent the given discrete-time (
    sampled data) sytem using
2 //            pulse transfer function and state
    space forms.
3 //        (B) Observe the responses of continuous-
    time and sampled data system.
4
5 //              scilab - 5.5.1
6 //              Operating System : Windows 7, 32-bit
7 //
    ************************************************************

8 //Clean the environment
9 close;
10 clear;
```

```
clc;
//
   ***********************************************************************
//A. Representation of discrete-time models
//
   ***********************************************************************

//State space representation
A=[0 1;-0.2 -0.1];
B=[0 1]';
C=[1 0];
D=0;
sysd=syslin('d',A,B,C,D);

// Pulse transfer function representation
Num=1;
Den=poly([0.2 0.1 1],'z','coeff');
Gz1=syslin('d',Num,Den)

//Pulse transfer function from ss model
Gz2=ss2tf(sysd)

//Response of the system with sampling time Ts=0.5
   sec.

//sampling Time
Ts=0.5;
t=0:Ts:10;
u=ones(1,length(t));

y=flts(u,sysd);
plot2d2(t,y,2)
zoom_rect([0 0 10 1.2])
xgrid(35)
title('Response of discrete time system','fontsize'
   ,3)
```

```
43 xlabel('kT','fontsize',2)
44 ylabel('y(kT)','fontsize',2)
45
46 //
   ************************************************************
47 // (B) Responses of the continuous-time and discrete
   -time model of the given
48 //     system.
49 //
   ************************************************************

50
51 //poles of contiuous time system are at -1, -2 and
   -3;
52 den=poly([-1,-2,-3],"s",'roots');
53 num=1;
54 g=num ./den
55 g=syslin('c',g)
56 tc=0:0.2:10;
57 yc=csim("step",tc,g)
58
59 //Discrete-time respresentation with Ts=0.5;
60 sysz=dscr(g,Ts);
61 gz=ss2tf(sysz)
62 yd=flts(u,sysz);
63
64 //Responses
65 figure,
66 plot(tc,yc,'blue') //continuous time system
67 plot2d2(t,yd,5)   // Discrete time system
68 title('Responses of continuous and discrete time
   system','fontsize',3)
69 xlabel('t','fontsize',2)
70 ylabel('y(t), (y(kT)','fontsize',2)
71 f=get("current_figure") //Current figure handle
72 f.background=8
73 xgrid(36)
```

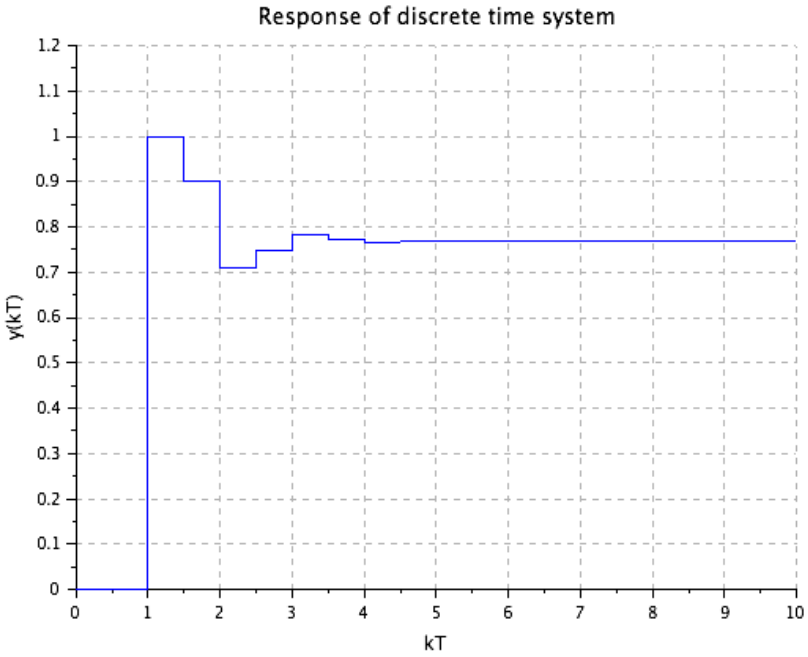

Figure 1.1: Lab01

```
74 h=legend('y(t)', 'y(kT)')
75 h.legend_location = "in_lower_right"
```

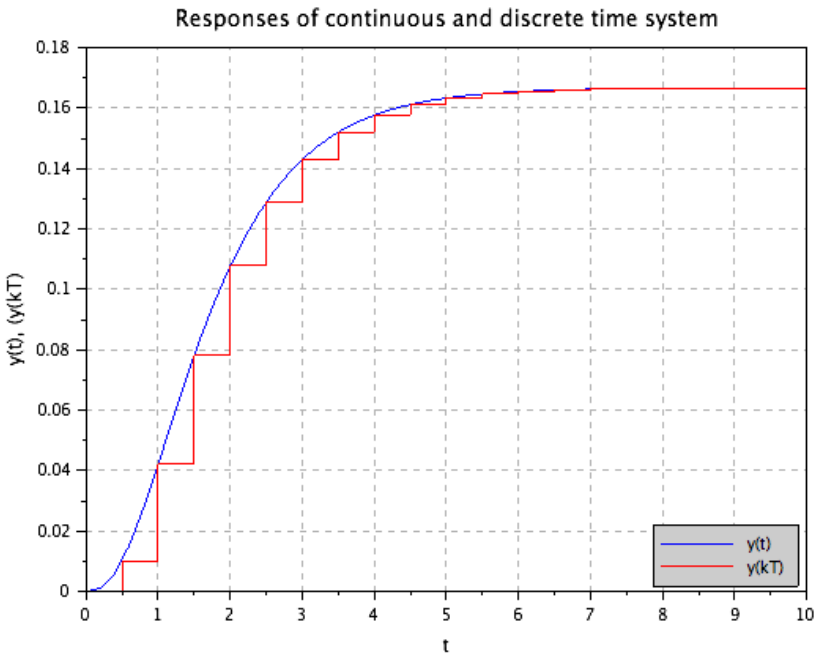

Figure 1.2: Lab01

Experiment: 2

Discretize the given continuous-time signal using Zero Order Hold and First Order Hold techniques.

Scilab code Solution 2.02 Lab02

```
1 // Lab02: Discretize the given continuous-time
    signal using Zero Order Hold
2 //         and First Order Hold techniques.
3
4 //               scilab - 5.5.1
5 //               Operating System : Windows 7, 32-bit
6 //
    ************************************************************

7 //Clean the environment
8 close;
9 clear;
10 clc;
11
12 //ramp generator during sampling period
```

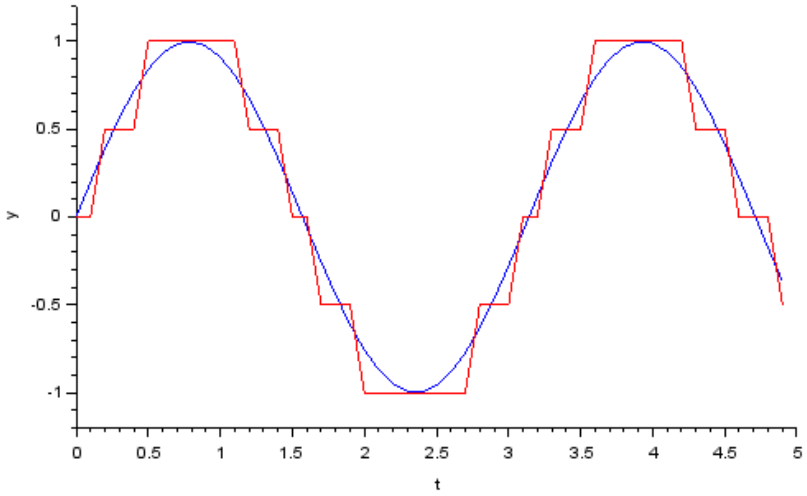

Figure 2.1: Lab02

```
13 tau.time = (0:0.5:1)';
14 tau.values = (0:0.5:1)';
15 importXcosDiagram('Lab02modelx.xcos')
16 typeof(scs_m) //The diagram data structure
17 xcos_simulate(scs_m, 4);
```

This code can be downloaded from the website wwww.scilab.in

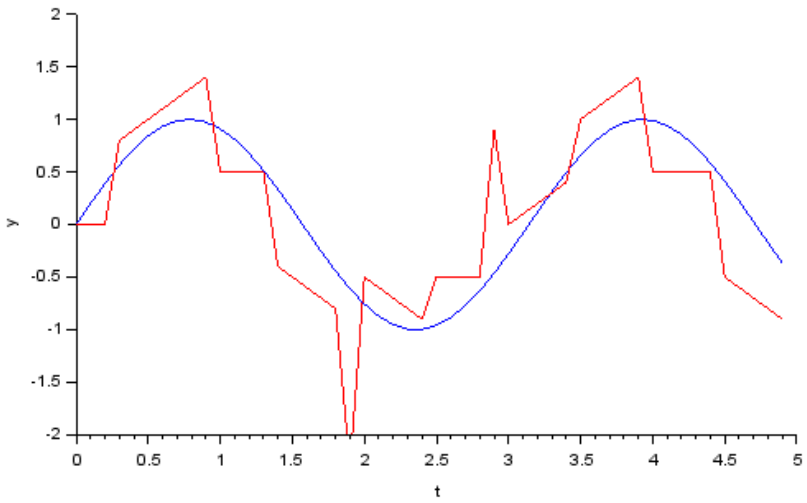

Figure 2.2: Lab02

Experiment: 3

Discretize the given continuous-time system using Bilinear Transformation.

Scilab code Solution 3.03 Lab03

```
1 // Lab03: Discretize the given  continuous-time
    system
2 //         using Bilinear Transformation.
3
4 //               scilab - 5.5.1
5 //               Operating System : Windows 7, 32-bit
6 //
    ************************************************************

7 //Clean the environment
8 close;
9 clear;
10 clc;
11
12 //
    ************************************************************
```

```
13 // State space representation of continuous time
      system
14 //
      ***********************************************************************

15 //
16 A=[0 1;-6 -5];
17 B=[0 1]';
18 C=[1 0];
19 D=0;
20 sysc=syslin('c',A,B,C,D);
21 //transfer function
22 Gs=ss2tf(sysc)
23 disp('Gs=')
24 disp(Gs)
25 //Response of the system
26 tc=0:0.1:10;
27 yc=csim("step",tc,sysc);
28
29 //
      ***********************************************************************

30 // Discretization of the system using bilinear
      transformation at
31 // sampling time Ts=0.5 sec
32 //
      ***********************************************************************

33 Ts=0.5;
34 sysd=cls2dls(sysc,Ts);
35 //Pulse transfer function
36 Gz=ss2tf(sysd)
37 disp('Gz=')
38 disp('Gz=',Gz)
39 //Response of the discrete system
40 td=0:Ts:10;
41 ud=ones(1,length(td));
42 yd=flts(ud,sysd);
```

```
43
44 //
   ************************************************************************
45 // Ploting the responses
46 //
   ************************************************************************
47 plot2d(tc,yc,5)//continuous time
48 plot2d2(td,yd,2) // Discrete time
49 xgrid(35)
50 title('Responses of continous and Tustin transformed
       discrete time system','fontsize',3)
51 xlabel('kT','fontsize',2)
52 ylabel('y(kT)','fontsize',2)
53 h=legend('y(t)', 'y(kT)')
54 h.legend_location = "in_lower_right";
```

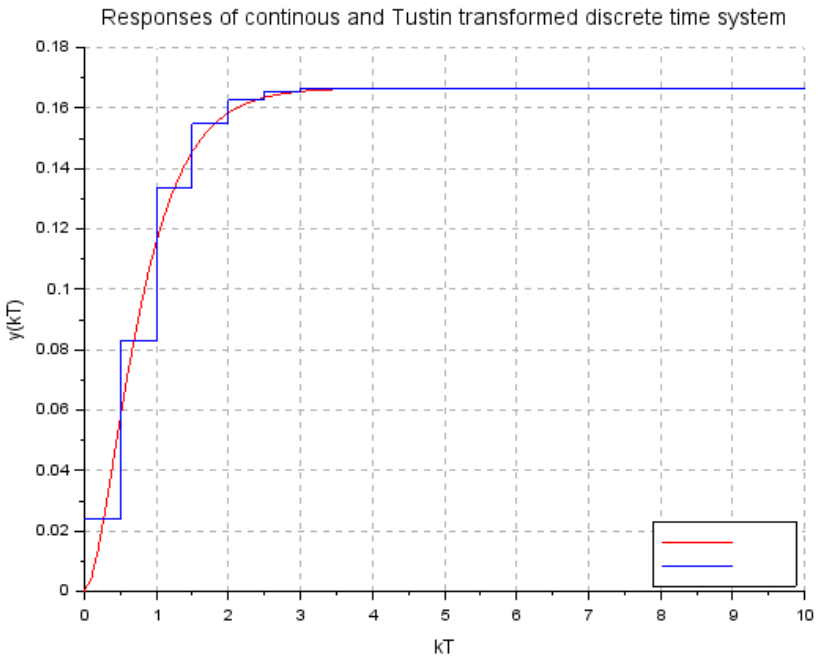

Figure 3.1: Lab03

Experiment: 4

Map constant attenuation loci from s-plane to z-plane.

Scilab code Solution 4.04 Lab04

```
1 //Lab. 04: Map constant attenuation loci from s-
    plane to z-plane
2
3 //              scilab - 5.5.1
4 //              Operating System : Windows 7, 32-bit
5 //
    ************************************************************

6 //Clean the environment
7 close;
8 clear;
9 clc;
10
11 //// System model
12 s=poly(0,'s');
13 Ts=0.2;
14 //
    ************************************************************
```

```
15 // S-plane pole-zero map for the continuous time
      system
16 //
      ************************************************************

17 for sigma=[-1 1];
18 for w=0:0.2:16
19     num=1;
20     den=poly([-sigma+%i*w, -sigma-%i*w],'s');
21     g=syslin('c',num./den);
22     plzr(g)
23 end
24 end
25 sgrid()
26 title('S-plane pole-zero map for the constant
      attenuation loci','fontsize',3)
27
28 // Zoom axes for clarity
29 zoom_rect([-5 -20 5 20])
30
31 //
      ************************************************************

32 //Z-plane pole-zero map for the sample data system
33 //
      ************************************************************

34    figure;
35 for sigma=[-1 1]
36 for w=0:0.2:16
37     num=1;
38     den=poly([-sigma+%i*w, -sigma-%i*w],'s');
39     g=syslin('c',num./den);
40     gz=dscr(g,Ts)
41     plzr(gz);
42 end
43 end
44 zgrid();
```

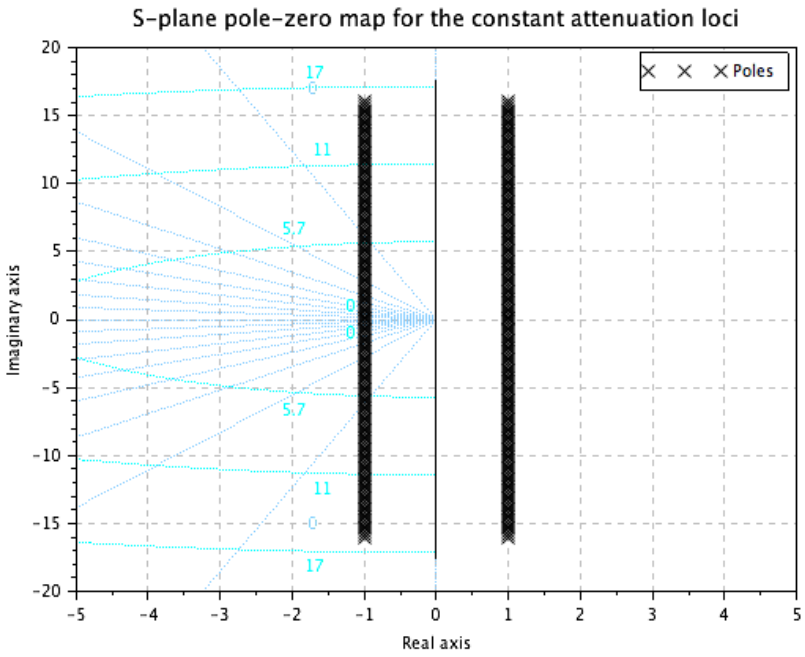

Figure 4.1: Lab04

```
45 f=get("current_figure") //Current figure handle
46 f.background=8
47 title('Z-plane pole-zero map for the constant
       attenuation loci','fontsize',3)
48
49 // Zoom axes for clarity
50 zoom_rect([-1.5 -1.5 1.5 1.5])
```

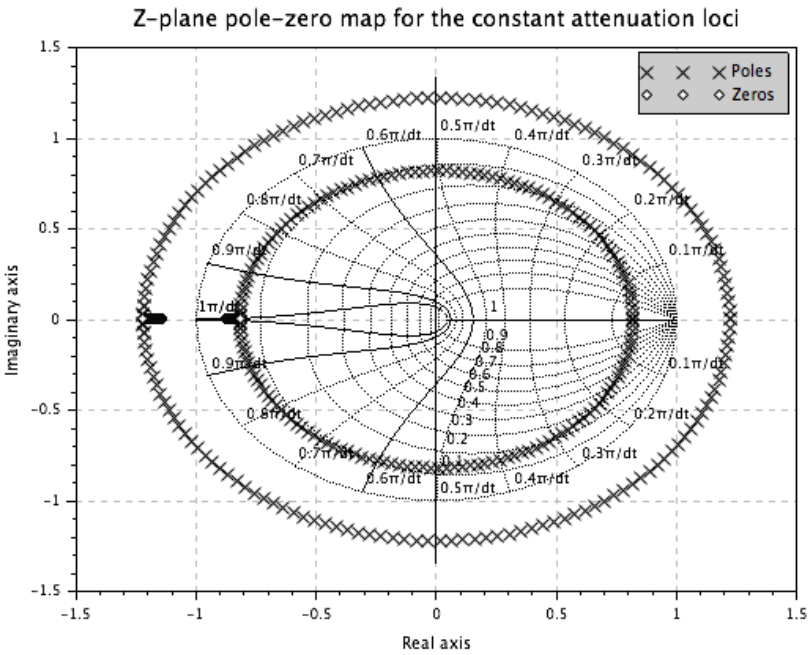

Figure 4.2: Lab04

Experiment: 5

Map constant frequency loci from s-plane to z-plane.

Scilab code Solution 5.05 Lab05

```
1 //Lab. 05: Map constant frequency loci from s-plane
     to z-plane
2
3 //                scilab - 5.5.1
4 //                Operating System : Windows 7, 32-bit
5 //
     ************************************************************

6 //Clean the environment
7 close;
8 clear;
9 clc;
10
11 // System model
12 s=poly(0,'s');
13 Ts=0.2;
14 w=1.5;
15
16 //
```

```
    ************************************************************************
17  // S-plane pole-zero map for the continuous time
    system
18  //
    ************************************************************************

19  for sigma=-1.1:0.2:20
20      num=1;
21      den=poly([-sigma+%i*w, -sigma-%i*w],'s');
22      g=syslin('c',num./den);
23
24      plzr(g)
25  end
26  sgrid()
27  title('S-plane pole-zero map for the constant
    frequency loci','fontsize',3)
28  // Zoom axes for clarity
29  zoom_rect([-21 -10 5 10])
30
31  //
    ************************************************************************

32  //Z-plane pole-zero map for the sample data system
33  //
    ************************************************************************

34     figure;
35  for sigma=-1.1:0.2:20
36      num=1;
37      den=poly([-sigma+%i*w, -sigma-%i*w],'s');
38      g=syslin('c',num./den);
39      gz=dscr(g,Ts)
40      plzr(gz);
41  end
42  zgrid()
43  f=get("current_figure") //Current figure handle
44  f.background=8
```

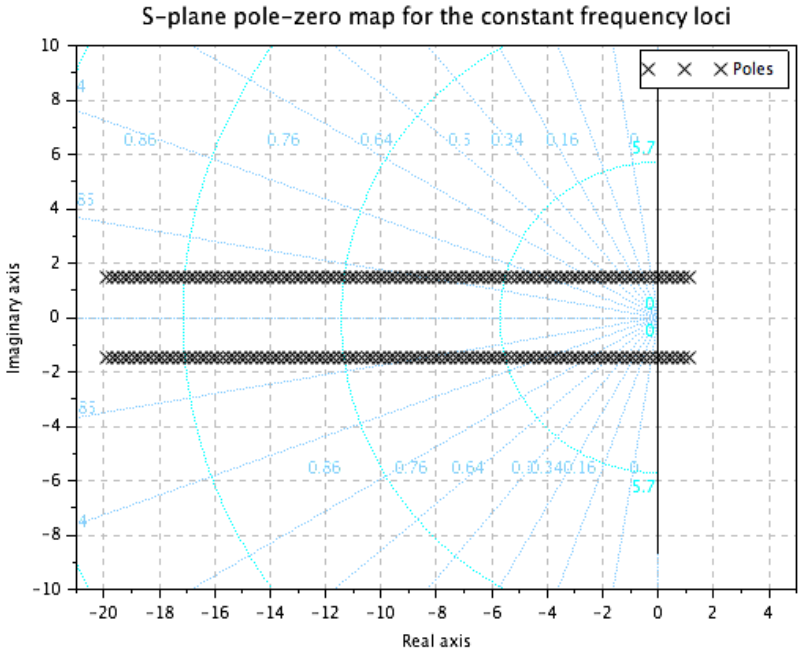

Figure 5.1: Lab05

```
45 title('Z-plane pole-zero map for the constant
       frequency loci','fontsize',3)
46 // Zoom axes for clarity
47 zoom_rect([-1.5 -1.2 1.5 1.2])
```

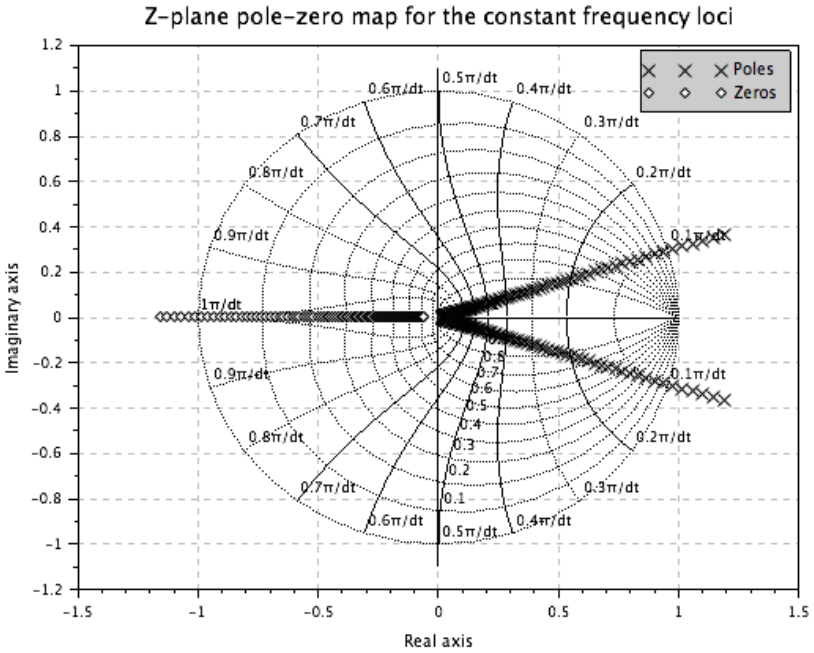

Figure 5.2: Lab05

Experiment: 6

Map constant constant damping ratio loci from s-plane to z-plane.

Scilab code Solution 6.06 Lab06

```
1 //Lab. 06: Map constant damping ratio loci from s-
     plane to z-plane
2
3 //                scilab - 5.5.1
4 //                Operating System : Windows 7, 32-bit
5 //
     ************************************************************

6 //Clean the environment
7 close;
8 clear;
9 clc;
10
11 // System model
12 s=poly(0,'s');
13 Ts=0.2;
14 //
```

```
    ************************************************************************
15  // S-plane pole-zero map for the continuous time
    system
16  //
    ************************************************************************

17  for w=0:0.2:19
18      sigma=w;
19      num=1;
20      den=poly([-sigma+%i*w, -sigma-%i*w],'s');
21      g=syslin('c',num./den);
22      plzr(g)
23  end
24  sgrid()
25  title('S-plane pole-zero map for the constant
    damping ratio loci','fontsize',3)
26
27  // Zoom axes for clarity
28
29  zoom_rect([-20 -22 20 22])
30
31  //
    ************************************************************************

32  //Z-plane pole-zero map for the sample data system
33  //
    ************************************************************************

34      figure;
35  for w=0:0.2:19
36      sigma=w;
37      num=1;
38      den=poly([-sigma+%i*w, -sigma-%i*w],'s');
39      g=syslin('c',num./den);
40      gz=dscr(g,Ts)
41      plzr(gz);
42  end
```

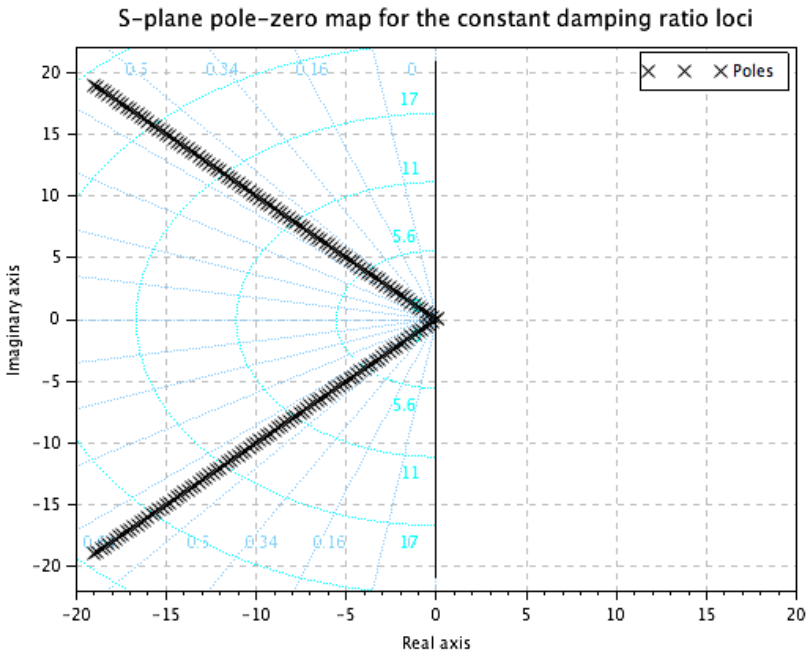

Figure 6.1: Lab06

```
43 zgrid();
44 f=get("current_figure") //Current figure handle
45 f.background=8
46 title('Z-plane pole-zero map for the constant
      damping ratio loci','fontsize',3)
47
48 // Zoom axes for clarity
49 zoom_rect([-1.2 -1.2 1.2 1.2])
```

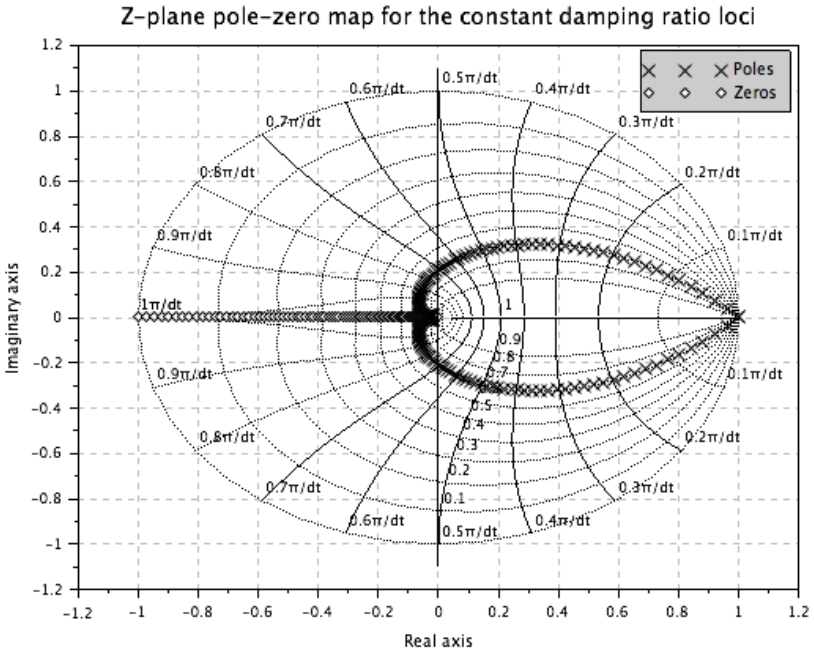

Figure 6.2: Lab06

Experiment: 7

Transform the discrete-time state model into canonical forms.

Scilab code Solution 7.07 Lab07

```
1 //Lab. 07: Transform the discrete-time state model
     into canonical forms.
2
3 //                scilab - 5.5.1
4 //                Operating System : Windows 7, 32-bit
5 //
     ************************************************************

6 //Clean the environment
7 close;
8 clear;
9 clc;
10
11 // State space model
12 A=[0 -0.4; 1 -1.3];
13 B=[0;1];
14 C=[0 1];
```

```
15 D=0;
16
17 sys=syslin('d',A,B,C,D)
18 mprintf('State space representation of the given
     discrete system is')
19 disp(sys)
20
21 // Transfer function model
22 systf=ss2tf(sys)
23 mprintf('Transfer function of the given discrete
     system is')
24 disp(systf)
25
26
27 // Eigen values of system matrix
28 eig_val=spec(A)
29 mprintf('Eigen values of the system matrix are')
30 disp(eig_val)
31
32 // Controllable canonical form
33 [Phi,Gamma,T]=canon(A,B)
34 T=flipdim(T,2);
35 Phi=T\A*T;
36 Gamma=T\B;
37 C=C*T;
38 D=D;
39 sysd=syslin('d',Phi,Gamma,C,D)
40 mprintf('State space representation of the given
     discrete system')
41 disp('in controllable canonical form is')
42 disp(sysd)
43
44 // Diagonal form
45 [Phid M]=bdiag(A);
46 Gammad=M\B;
47 Cd=C*M;
48 Dd=D;
49 sysd=syslin('d',Phid,Gammad,Cd,Dd)
```

```
50 mprintf('State space representation of the given')
51 disp('discrete system in diagonal form is')
52 disp(sysd)
```

Experiment: 8

Check controllability & observability of a given system.

Scilab code Solution 8.08 Lab08

```
1 //Lab. 08: Check controllability & observability of
     a given system.
2
3 //                scilab - 5.5.1
4 //                Operating System : Windows 7, 32-bit
5 //
     ************************************************************

6 //Clean the environment
7 close;
8 clear;
9 clc;
10
11 // State space representation
12 A=[-0.2 0;0 -0.8];
13 B=[1 1]';
14 C=[4/3 -1/3];
15 D=0;
16 sys=syslin('d',A,B,C,D)
```

```
17
18 // Controllability test
19
20 n=cont_mat(sys)
21 mprintf('Controllability matrix is')
22 disp(n)
23
24 if rank(n)==2 then
25     disp('Rank of controllability matrix is full,')
26     disp('therefore system is controllable')
27 else
28     disp('Rank of controllability matrixis not full,
       ')
29     disp('therefore system is uncontrollable')
30 end
31
32 disp('')
33
34 // Observability test
35 m=obsv_mat(sys)
36 mprintf(' Observability matrix is')
37 disp(m)
38
39 if rank(m)==2 then
40     disp('Rank of observability matrix is full,')
41     disp('therefore system is observable')
42 else
43     disp('Rank of observability matrix is not full,'
       )
44     disp('therefore system is unobservable')
45 end
```

Experiment: 9

Design state feedback controller for a given system to achieve desired dynamic characteristics.

Scilab code Solution 9.09 Lab09

```
1 //
    ____________________________________________________________________

2 // Lab. 09: Design state feedback controller for a
    given system to achieve desired dynamic
    characteristics.
3 //                scilab - 5.5.1
4 //                Operating System : Windows 7, 32-bit
5 //
    ************************************************************

6 //Clean the environment
7 close;
```

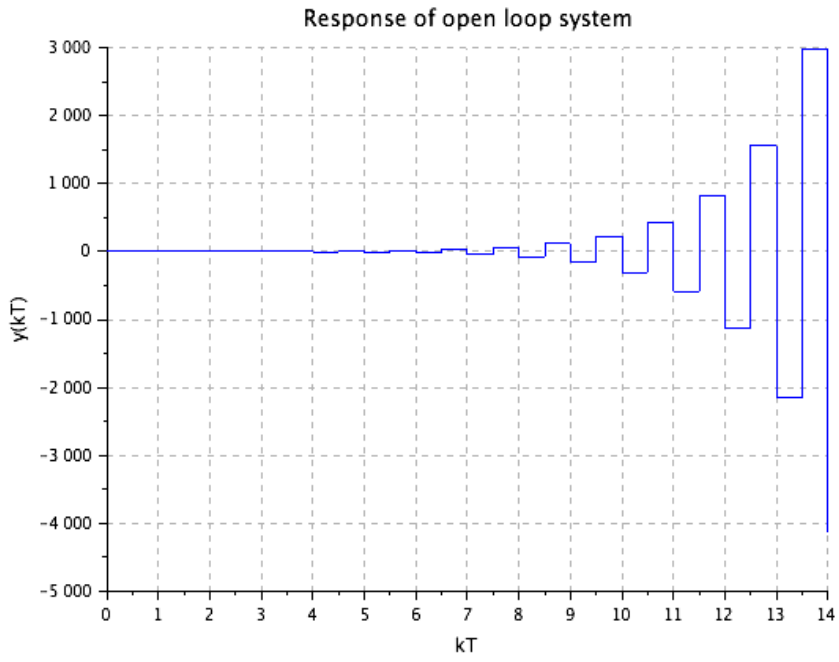

Figure 9.1: Lab09

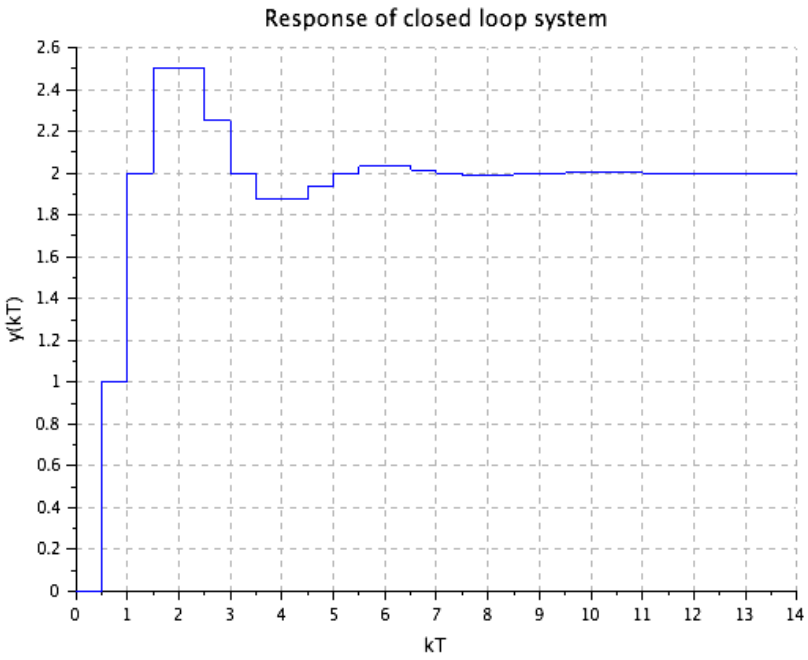

Figure 9.2: Lab09

```
clear;
clc;

// State space representation
A=[0 1;-0.16 -1.5];
B=[0 1]';
C=[0 1];
D=0;

sys1=syslin('d',A,B,C,D)

// Desired poles
Pd=[0.5+0.5*%i 0.5-0.5*%i];

// State feedback gain matrix
K=ppol(A,B,Pd)
mprintf('State feedback gain matrix is K=')
disp(K)

//Closed loop system
sys=syslin('d',A-B*K,B,C,D)

// Sampling Time
Ts=0.5;
t=0:Ts:14;
u=ones(1,length(t));

//Response of open loop system
y1=flts(u,sys1);
plot2d2(t,y1,2)
xgrid(35)
title('Response of open loop system','fontsize',3)
xlabel('kT','fontsize',2)
ylabel('y(kT)','fontsize',2)

//Response of closed loop system
y=flts(u,sys);
figure,
```

```
46 plot2d2(t,y,2)
47 f=get("current_figure") //Current figure handle
48 f.background=8
49 xgrid(36)
50 title('Response of closed loop system','fontsize',3)
51 xlabel('kT','fontsize',2)
52 ylabel('y(kT)','fontsize',2)
```

Experiment: 10

Design dead beat controller for a given system.

Scilab code Solution 10.10 Lab10

```
1 //
    ____________________________________________________________________

2 // Lab.10: Design dead beat controller for a given
    system.
3 //                scilab - 5.5.1
4 //                Operating System : Windows 7, 32-bit
5 //
    ********************************************************************

6 //Clean the environment
7 close;
8 clear;
9 clc;
10
```

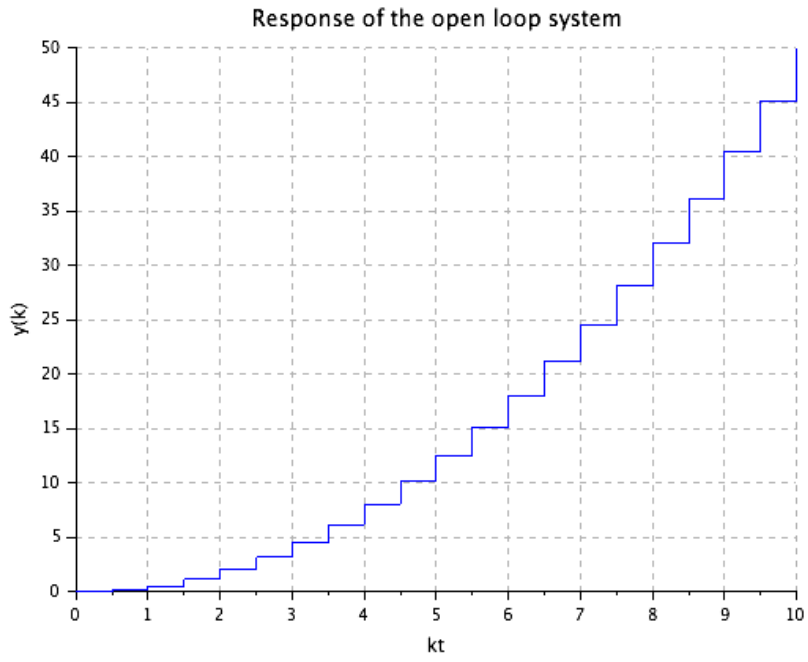

Figure 10.1: Lab10

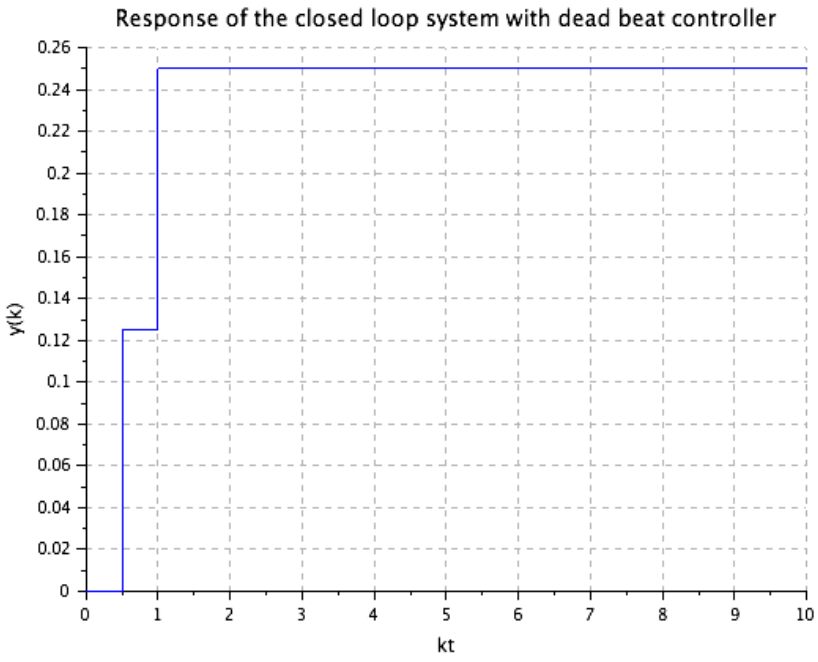

Figure 10.2: Lab10

```
11 //Sampling time
12 Ts=0.5;
13
14 // State space representation of the continuous time
       system
15 A=[0 1;0 0];
16 B=[0 1]';
17 C=[1 0];
18 D=0;
19
20 sys1=syslin('c',A,B,C,D)
21
22 //Discrete model of the system
23
24 sys=dscr(sys1,Ts)
25 mprintf('Discrete model of the system is sys=')
26 disp(sys)
27
28 // Desired poles
29 Pd=[0 0];
30
31 // State feedback gain matrix
32 K=ppol(sys.A,sys.B,Pd)
33 mprintf('State feedback gain matrix is K=')
34 disp(K)
35
36 //Responses
37 t=0:Ts:10;
38 u=ones(1,length(t));
39
40 //Response of open loop system
41 y1=flts(u,sys);
42 plot2d2(t,y1,2)
43 xgrid(35)
44 title('Response of the open loop system','fontsize'
      ,3)
45 xlabel('kt','fontsize',2)
46 ylabel('y(k)','fontsize',2)
```

```
47
48
49 //Response of closed loop system
50 syscl=syslin('d',sys.A-sys.B*K,sys.B,sys.C,0)
51 y=flts(u,syscl);
52 figure,
53 plot2d2(t,y,2)
54 f=get("current_figure") //Current figure handle
55 f.background=8
56 xgrid(36)
57 title('Response of the closed loop system with dead
      beat controller','fontsize',3)
58 xlabel('kt','fontsize',2)
59 ylabel('y(k)','fontsize',2)
```

Experiment: 11

Design full state observer for a given system.

Scilab code Solution 11.11 Lab11

```
1 //
    ____________________________________________________________________

2 // Lab. 11: Design a full state observer for the
    system.
3 //                scilab - 5.5.1
4 //                Operating System : Windows 7, 32-bit
5 //
    ********************************************************************

6 //Clean the environment
7 close;
8 clear;
9 clc;
10
11 //State space model
12 A=[0 1 0; 0 0 1; 0.6 0.7 0.2 ];
13 B=[0 0 1]';
14 C=[1 0 0];
```

```
15 D=0;
16
17 //Stabilizer design
18 // Desired poles
19 Pd=[0.2,-0.5+0.5*%i,-0.5-0.5*%i];
20
21 // State feedback gain matrix
22 K=ppol(A,B,Pd)
23
24 //Computation of gain for dead beat observer
      response
25 obsr_pol=[0 0 0];
26 L=ppol(A',C',obsr_pol)'
27
28 // Augmented system
29 temp=size(A);
30 Aa=[A-B*K    B*K; zeros(temp(1),temp(2))     A-L*C
      ];
31 temp=size(Aa);
32 Ba=zeros(temp(1),1);
33 Ca=eye(6,6);
34 sys=syslin('d',Aa,Ba,Ca,zeros(6,1))
35
36 //Observer error
37 t=0:0.2:4.5;
38 u=zeros(1,length(t));
39 //y=flts(u,sys);
40 x=ltitr(Aa,Ba,u,[0.1 0.1 0.1 -0.5 -0.5 -0.5]')
41
42 temp=size(Aa);
43 temp=temp(1,1)/2;
44
45 col=[1 2 5]; //specifying plot colors
46 for i=1:temp
47     subplot(2,1,1), plot2d2(t,x(i,:),col(1,i))
48     if i==temp then
49         title('States of the system','fontsize',2);
50         xlabel('$t$','fontsize',2);
```

```
51          ylabel('$x(kT)$','fontsize',2);
52          h1=legend('$x_1(kT)$','$x_2(kT)$','$x_3(kT)$
                ');
53          h1.legend_location = "in_lower_right";
54          xgrid(35)
55      end
56      subplot(2,1,2), plot2d2(t,x(i+3,:),col(1,i))
57      if i==temp then
58          title('Observer error','fontsize',2)
59          xlabel('$t$','fontsize',2)
60          ylabel('$e(kT)=x(kT)-\hat x(kT)$','fontsize'
                ,2)
61          h2=legend('$e_1(kT)$','$e_2(kT)$','$e_3(kT)$
                ')
62          h2.legend_location = "in_lower_right"
63          xgrid(35)
64      end
65  end
```

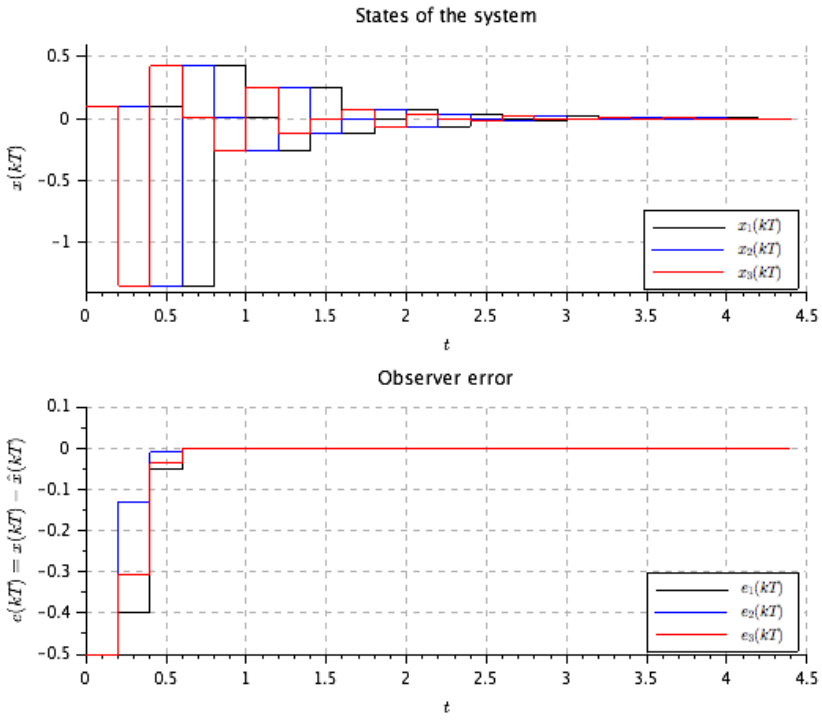

Figure 11.1: Lab11

Experiment: 12

Determine stability of a given system by using Lyapunov stability analysis.

Scilab code Solution 12.12 Lab12

```
1 //Lab. 12: Determine stability of a given system by
     using Lyapunov stability analysis
2 //                scilab - 5.5.1
3 //                Operating System : Windows 7, 32-bit
4 //
     ************************************************************

5 //Clean the environment
6 close;
7 clear;
8 clc;
9
10 //System matrix
11 a=[0 1; -0.5 -1];
12 q=-eye(2,2);
13 p=lyap(a,q,'d');
14
```

```
15 // For a stable system matrix, p should be positive
      definite for
16 //which all the principle minors or all eigen values
       of the matrix p
17 // should be positive
18
19 eig_val=spec(p);
20 m=length(eig_val);
21 stable=0;
22 for i=1:m;
23     if real(eig_val(i))>0 then
24         stable=stable+1;
25         end
26 end
27 if stable==m then
28     disp('The system is asymptotically stable')
29 else
30     disp('The system is unstable or critically
          stable')
31 end
```

Experiment: 13

Construct root loci and bode plots for a given discrete-time system.

Scilab code Solution 13.13 Lab13

```
1 //Lab. 13: Construct root loci and bode plots for a
     given discrete-time system.
2
3 //                scilab - 5.5.1
4 //                Operating System : Windows 7, 32-bit
5 //
     ***********************************************************************

6 //Clean the environment
7 close;
8 clear;
9 clc;
10
11 //Sampling time
12 Ts=0.4;
13
14 //System transfer function.
```

```
15 s=poly(0,'s');
16 g=1/(s*(s+1));
17 g=syslin('c',g);
18 gz=dscr(g,Ts)//discrete model
19
20 // Root locus for the discrete system
21 evans(gz,100)
22 title('Root locus of the discrete-time system')
23 zgrid(0:0.1:0.5)
24 zoom_rect([-1.2 -1.5 1.2 1.5])
25 figure
26
27 // Bode plot for the discrete system
28 bode(gz)
29 f=get("current_figure") //Current figure handle
30 f.background=8
31 title('Bode plot of discrete-time system')
```

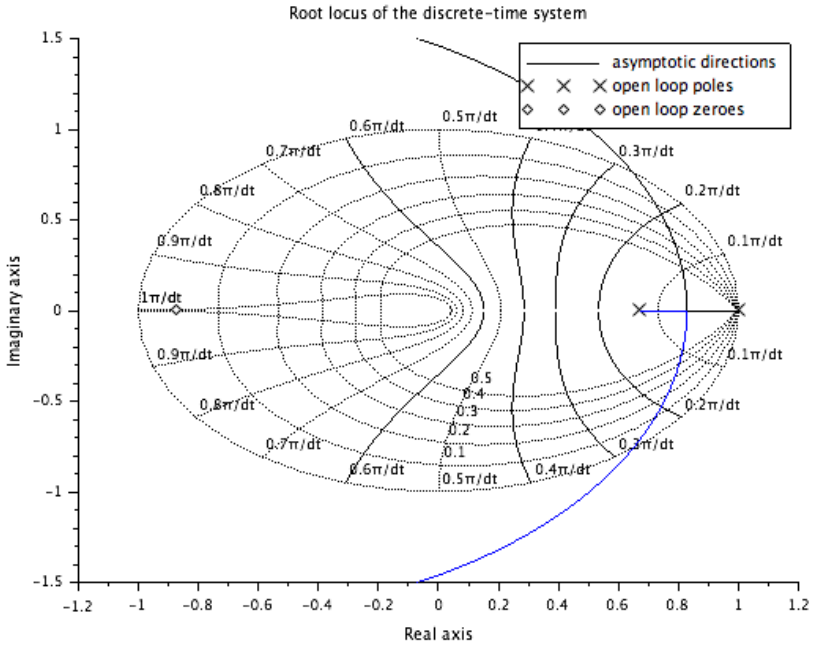

Figure 13.1: Lab13

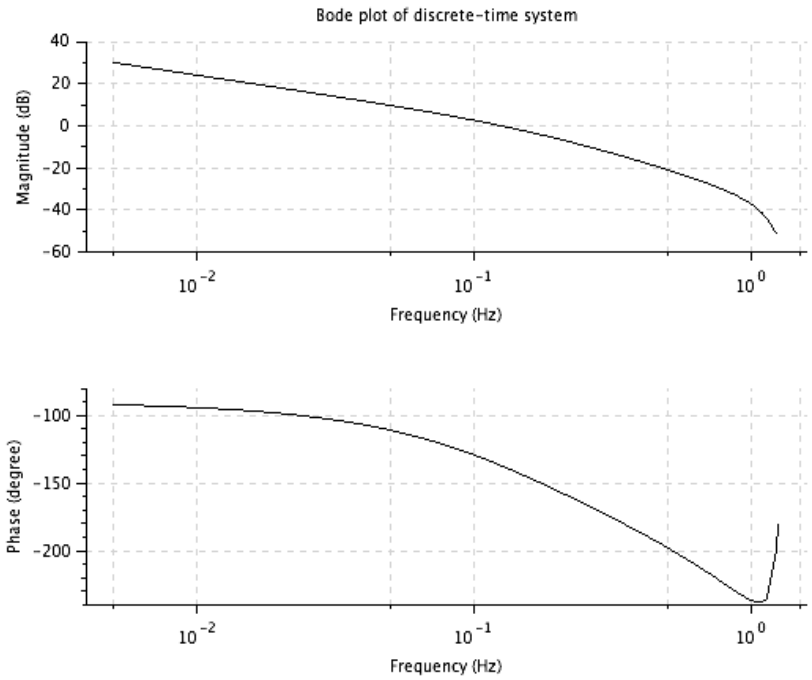

Figure 13.2: Lab13